



Traversable sliding cover

Type SAM 102 R

- Fully traversable, 13 t axle load or more
- Flush with the hall floor
- Control via operating element installed in the hall area
- Work on various different levels possible
- The sliding cover complies with the requirements of DGUV 109
- Optimum safety for your employees
- TÜV type-tested and certified system
- ISO 9001:2015 certified production facility
- DIN EN 1090 certified production facility
- Various patents have been granted
- Top product quality
- MADE in Germany

The benefit for you: Full use of the entire hall area.

Optimum accident prevention.


- System available as return flow or storage variant
- Aluminium or hot-dip galvanised steel design
- The aluminium version has a non-slip surface
- V2A bush conveyor chain with self-lubricating Permaglide bushes

We have the solution to every challenge. Let one of our specialists offer you individual advice on your project.

Technical description

Axle load:	13 t
Traffic load:	in accordance with SLW 60, DIN EN 1991-1-1:2010-12, DIN EN 1991-1-1 /NA:2010-12, DIN Technical Report 101:2009-03 and DIN 4085 Supplement 1:2011-12
Length:	according to customer requirements
Inside width:	1.02 m in clearance
Working width:	1.62 m in clearance
Standing height:	according to customer requirements



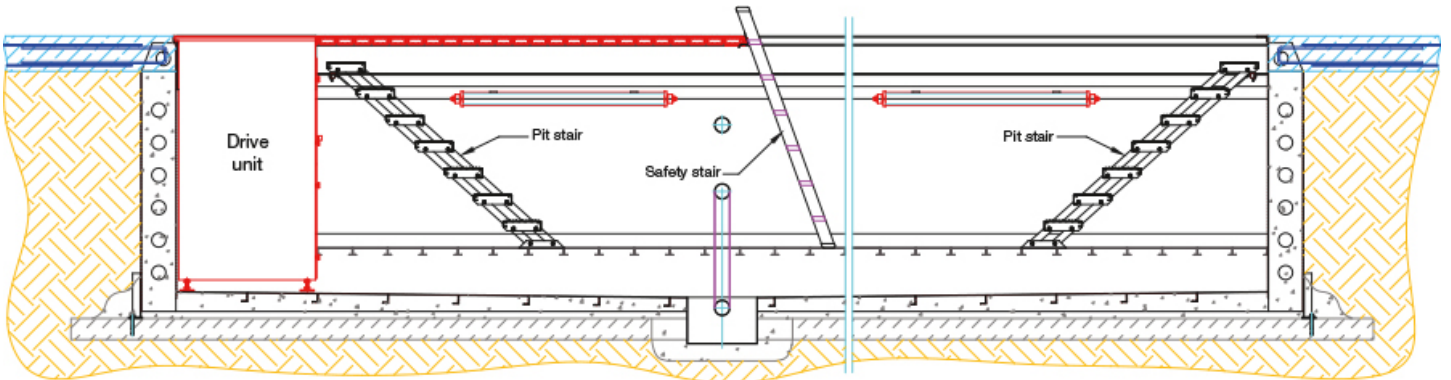

Balzer GmbH & Co. KG
 Zeissweg 9
 87700 Memmingen
 Phone: +49 (0)8331 99041-0
 info@balzer-mm.de

Prefabricated assembly pits
 Umweltgrube®
 Sliding covers
 Rail vehicle pits

www.balzer-mm.de